


CCS-S

COOLANT CLEANING STATION

- RECYCLES USED COOLANT
- SIGNIFICANTLY EXTENDS COOLANT LIFE
- REMOVES PARTICLES AND TRAMP OIL
- CONTROLS BACTERIAL GROWTH
- COOLANT COSTS (PURCHASE AND DISPOSAL) ARE SIGNIFICANTLY REDUCED
- REDUCES CARBON FOOTPRINT
- IMPROVES OPERATOR CONDITIONS - REDUCES OIL MIST, CONTROLS BACTERIAL GROWTH, COOLANT ODOUR REDUCED
- INCREASES PRODUCTIVITY AND PROFITABILITY

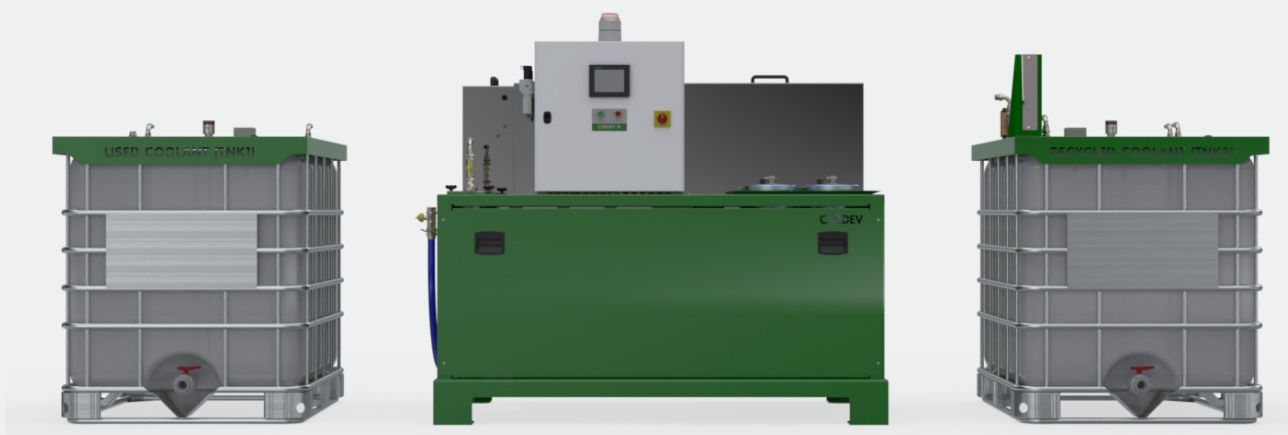

VOLTAGE OPTIONS




COMPRESSED AIR
SUPPLY REQUIRED



NEW COOLANT OR
WATER SUPPLY
REQUIRED

CCS-S - COOLANT CLEANING STATION

DIMENSIONS

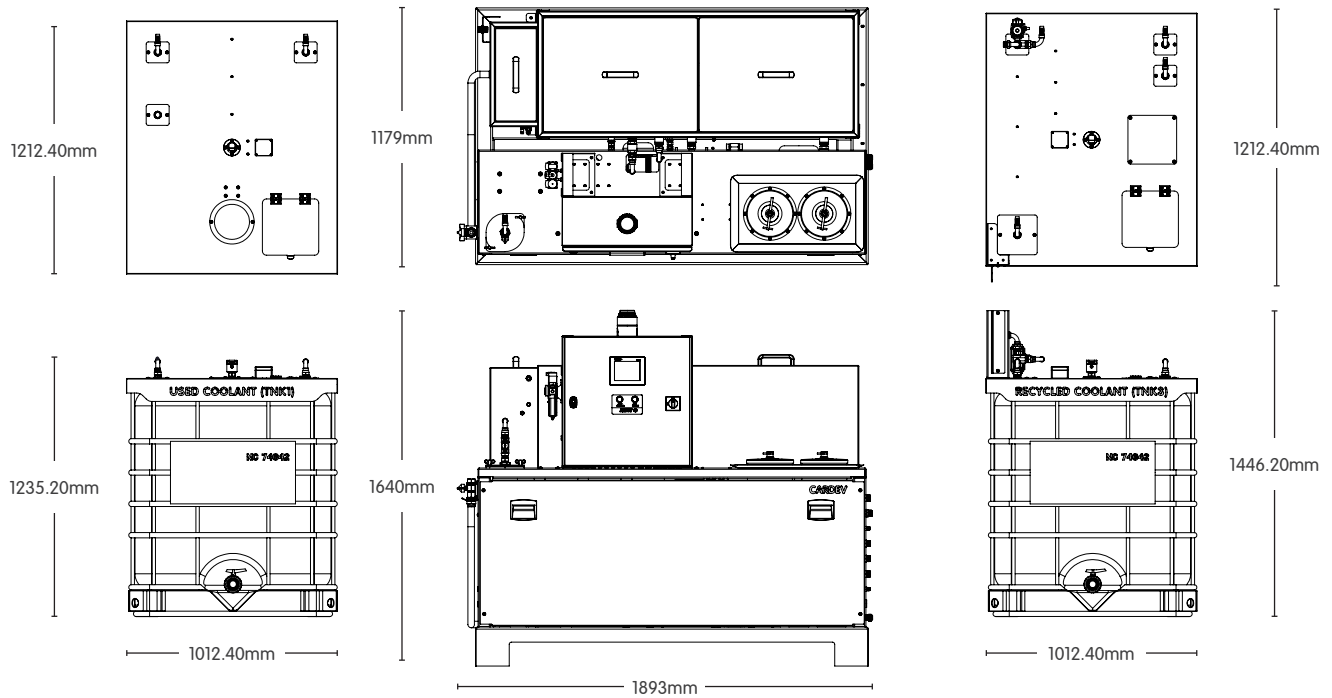

FEATURES

- FULLY AUTOMATED SYSTEM
- CONTROLS BACTERIA LEVELS AND PREVENTS BIO-FILM FORMATION
- TRAMP OIL SEPARATION, REMOVAL AND COLLECTION
- AUTOMATED OFFSETTING OF COOLANT CONCENTRATION
- CAN BE LINKED TO A CARDEV SMARTMIX - COOLANT MIXING STATION

RESULTS

- EXTENDS COOLANT LIFE
- CLEAN, TRAMP OIL FREE COOLANT
- COOLANT COSTS (PURCHASE AND DISPOSAL) ARE SIGNIFICANTLY REDUCED
- REDUCED CARBON FOOTPRINT
- IMPROVED OPERATOR CONDITIONS - REDUCED OIL MIST, REDUCED BACTERIAL GROWTH, COOLANT ODOUR REDUCED
- INCREASED PRODUCTIVITY AND PROFITABILITY

TECHNICAL SPECIFICATIONS

COOLANT DELIVERY RATE (L/M)	≤ 90 L/M		
COOLANT OUTLET	3/4" BSP SOCKET (TO PIPEWORK SYSTEM)		
VOLTAGE	230V	CURRENT DRAW	6 AMPS
CCS-S DIMENSIONS (MM)	H: 1640	W: 1893	D: 1179
CSS WEIGHT (KG)	600		

ETL FLUID EXPERTS LTD
GRIMBALD CRAG ROAD, KNARESBOROUGH
NORTH YORKSHIRE, HG5 8PY

T +44 (0)1423 522911 E SALES@ETLFE.COM

WWW.ETLFLUIDEXPERTS.COM

THE SPECIFICATION AND PHOTOGRAPHY IS FOR REFERENCE ONLY AND MAY BE SUBJECT TO CHANGE.
V03-09-07-24-GB / © ETL FLUID EXPERTS LTD. ALL RIGHTS RESERVED.

